Do not discard this card; the following instructions should be retained for future reference.
This information must be read and understood, failure to do so could result in serious injury or death
Use: Only properly trained people should use this equipment.

The activity for which this product may be used is inherently dangerous. The consequences of incorrect selection, use or maintenance of equipment could result in damage, serious injury or death. This device is designed to be fitted to equipment for individual protection against significant falls, and must be assigned individually.
Fall arrest anchorage points must be situated above the user and it must have a minimum strength of 15 kN as per AS/NZS1891-4 (for Fall Arrest).

Karabiners or other connectors must only be used in the long axis, do not load across the gate, the closure of the gate and the locking mechanism must be checked on every use.
It is not suitable for constant manipulation during the course of a day.
This unit conforms to the relevant requirements of AS/NZS1891-4 as fall protection or restraint equipment.

Falls

Be aware that any product in the safety system can be damaged in a fall and consequently should always be examined for defects before reuse. If the product or any of the component parts of the system exhibit signs of wear or defect, or if there is any doubt, replace it.

Before Use, You Must

1. Check that this unit is compatible with all other components of your safety system.
2. If an insertion pin is required, a competent person must check that the pin has been safely secured.
3. Check that the connector is in good condition and that the gate and locking mechanisms function correctly.

Do not use this equipment if:

1. It shows signs of damage or wear
2. You have reason to believe that this unit has sustained a fall

Do not under any circumstances modify this equipment or use it for any application other than for which is was designed.

MAINTENANCE

- The user's company safety officer should maintain a record log of servicing & inspection dates for this unit. (see AS/NZS1891-4 for guidance on inspection cycles)
- For mechanical devices small applications of mineral oil can be used as a lubricant after cleaning.
- Wash textile components with only with mild soap and warm water, rinse thoroughly and allow to dry in the shade. Do not tumble dry.
- Store the equipment in a dry, dark cool position, away from chemicals, corrosives, high humidity, sharp objects, U.V radiations, salt environment, or any other possible causes of damage.
- Do not store the equipment wet.

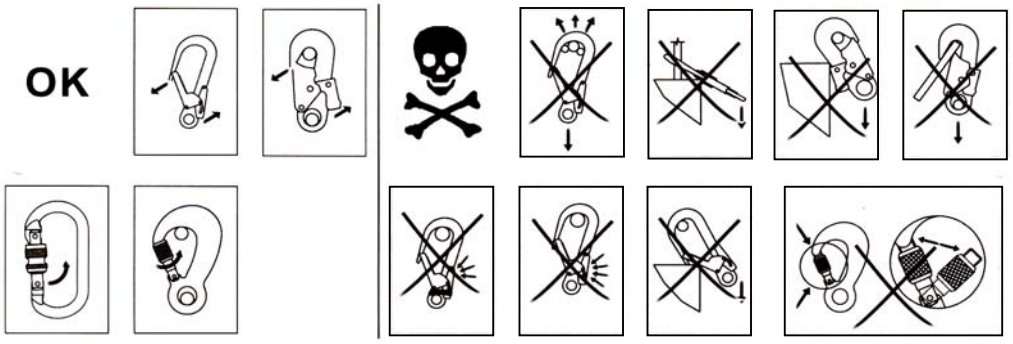

The manufacturer or supplier will not accept any responsibility for damage, injury or death resulting from misuse.

For information on this product or any of the other products in the MILLER range contact us at:
SPERIAN FALL PROTECTION AUSTRALIA PTY LTD
3 Walker St
Braeside 3195
Victoria Australia Ph 1300 139 166
New Zealand Ph 0800 322 200

Card Part Number: M3060095 Rev B

PERSON ISSUED TO	
DATE OF PURCHASE	
MODEL/SERIAL NUMBER	

INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	
INSPECTION DATE:	